




# TAKAME RWR1

## Wearable UHF Reader

TAKAME RWR1 is our refined and new generation wearable Bluetooth UHF readers. Being a compact and portable device, it can be operated together with gloves, wristbands, or lanyards and make your work much more flexible and convenient. With a built-in UHF module, TAKAME RWR1 possesses a powerful data-collection and transmission function via a simple Bluetooth connection with Android/iOS devices. Removable battery and fast charging capability enable it to achieve work continuity for a long duration. Besides, this tiny device has the protection features like dustproof, waterproof, shockproof, and drop resistance. All these functions make the RWR1 a most adaptable device in a wide spectrum of circumstances such as logistics & express delivery, retail store management, warehouse management, power patrol inspection, asset management, e-commerce picking, and tickets checking, etc. helping users free their hands and significantly improve work efficiency.

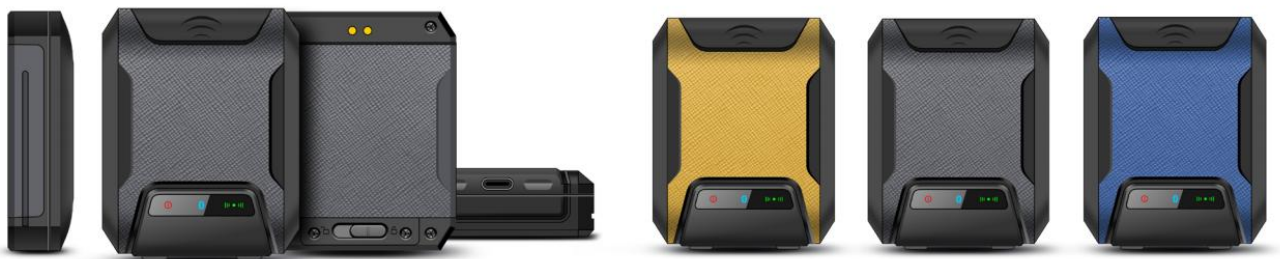

# Specification

Physical Characteristics	
Dimensions	50 × 62 × 19 mm / 1.97 × 2.44 × 0.75 in.
Weight	64 g / 2.26 oz. ( with glove: 90 g / 3.17 oz. )
Color	Yellow, Blue, Gray
Port	USB Type-C
Button	ON/OFF, SCAN
Battery	1200 mAh ( removable )
Charging Current	5 V / 1.5 A
Charging Duration	1 hours
LED Indicator	Red indicator will be ON when charging; Blue indicator will be ON when device has been fully charged; Green indicator will be ON when battery is higher than 20%; Green indicator will flash when battery is lower than 20%; Bluetooth is not paired when bluetooth indicator is OFF; Bluetooth is paired when bluetooth indicator is ON
Performance	
MCU	Cortex-M3 72MHz
Developing Environment	
SDK	Android / IOS SDK Supported
Security	RFID Encrypted Module ( reserve )
Communication	
USB Type C	USB connection to realize data transfer
BT	Bluetooth Low Energy (BLE) 5.0

User Environment	
Operating Temp.	-20 °C to +50 °C
Storage Temp.	-40 °C to +70 °C
Humidity	5% RH - 95% RH non condensing
Dropping	1.2 m dropping on concrete
Sealing	IP65
UHF	
Engine	CM-3N module based on Impinj E310
Antenna parameter	Linear Polarized Antenna (-2.2dBi)
Frequency	920-925 MHz / 902-928 MHz / 865-868 MHz
Protocol	EPC C1 GEN2 / ISO18000-6C
Power	0.5W (27dBm, support +19-27dBm adjustable)
R/W range	80 cm
*Range depends on tags and environment	
Accessories (Optional)	
Glove, wristband, lanyard, charging cradle for battery	

Notice: Product specifications are subject to change without prior notice.



## China & Hong Kong

**Hong Kong**  
Tel: 852 - 2370 2227  
Fax: 852 - 2370 2054

**Guangzhou**  
Tel: 86 - 20 - 2882 1366  
Fax: 86 - 20 - 8761 0213

**Shanghai**  
Tel: 86 - 21 - 6282 5319  
Fax: 86 - 21 - 6282 5283

HK\_Sales@sysscan.com.hk GZ\_Sales@sysscan.com.hk SH\_Sales@sysscan.com.hk

<http://www.sysscan.com.hk> <http://www.sysscan.com.cn>